



Shaker

Coaxial Shower Valve with Flexible Kit

SVK44

SHOWERING

FEATURES

Thermostatic dual control

3 spray pattern deluxe handset

Ceiling fed water supply

Can easily be installed to a fully tiled wall

5 Year Guarantee

Logo as it appears on product: 


INCLUDED COMPONENTS

Shaker Coaxial Shower Valve

SVK44



INSTALLATION DETAILS

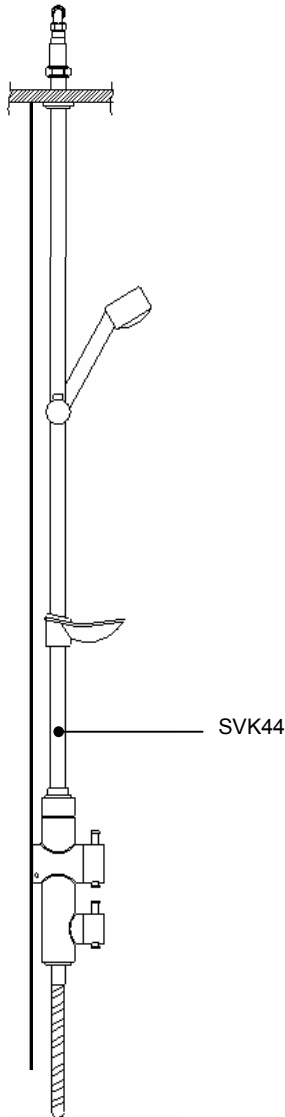

PRODUCT DETAILS

Fits directly to a solid wall and rises to the ceiling.
 Can be fitted to an existing tiled surface.
 Ideally suited to low pressure installations.
 Both hot and cold water supplies are fed, separately, through the vertical riser. The cold water is fed within the riser's outer tube, preventing the riser from getting hot.
 Dual control, thermostatic shower allow separate adjustment of water temperature and flow, so you can set the water temperature and simply turn the shower on or off.
 Thermostatic showers maintain a constant water temperature to within 1° regardless of the demand on the water supply.
 All Heritage showers are supplied with filters, check valves and optional flow restrictors to ensure efficient operation.
 Safety features include pre set maximum temperature of 45° and instant shut down if water supply fails.

Includes an adjustable showerhead bracket, soap tray and a deluxe 3 mode handset.

Operating pressure 0.2 - 10 bar
 Minimum recommended operating pressure with deluxe handset 0.2 bar
 Overall dimensions 1655 x 150 x 145mm

	0.1	0.2	0.3	0.4	0.5	1	2	3	4	5
SVK44	7	20	12.5	14.5	16.5	22	31	40	45	49.5

Flow rate is open outlet only. Handset will restrict flow further. Flow is measured in litres per minute.



Shaker

Coaxial Shower Valve

SVK44

SHOWERING

FEATURES

- hb logo
- Thermostatic dual control
- 5 Year Guarantee



FINISHES AVAILABLE

Chrome

INCLUDED COMPONENTS

Shaker Coaxial Valve & Kit	SVK44
Packed Weight	7.62Kgs
Packed Size	155 x 165 x 980mm

SPARE PARTS

For spare part availability please contact Heritage Technical Department

