SLCDUALMIN03

RYDE Shower Range

Ryde Dual Control Exposed Mini Valve with Fixed Kit Vintage Gold



Features:


- Optimised for UK market, designed to work at pressure range of 0.1 5.0bar
- Thermostatic temperature control and automatic stop prevent surges of hot or cold water
- Eco-friendly to save as much water as possible
- Adjustable inlet centres, allowing you to use existing pipework with centres measuring anything between 110mm and 155mm.
- Petite 5" shower rose

Product Certifications:






Additional Information:

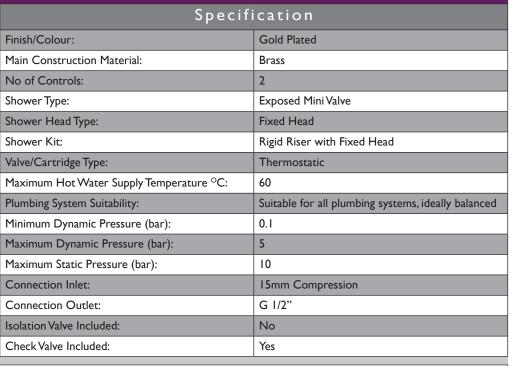

Dimensions (measurements in mm)

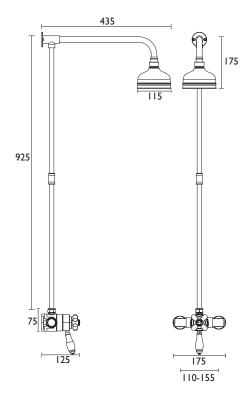

Flow Rates (I/min)						
System Pressure (bar)	0.1	0.5	1	2	3	5
Through Fixed Head (mixed)	1.6	3.5	4.9	6.9	8.5	П

TECHNICAL DATA SHEET



