



Specification

Product Type:	Taps
Main Construction Material:	Brass
Mount Type:	Floor Mounted
Handle Type:	Lever
Connection Inlet:	M12 x 900mm Flexible Tails
Connection Outlet:	Anti-Splash
Number of Tap Holes:	0
Valve/Cartridge Type:	Manual
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	2 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Hot Water Temperature °C:	65°C
Maximum Static Pressure (bar):	10
Flow Type:	Single
Isolation Included:	No


Features:

- Compatible with low pressure water systems, optimised for UK market
- Quarter turn ceramic discs - for smooth operation and added durability
- Available in a selection of finishes

Product Certifications:



Dimensions (measurements in mm)

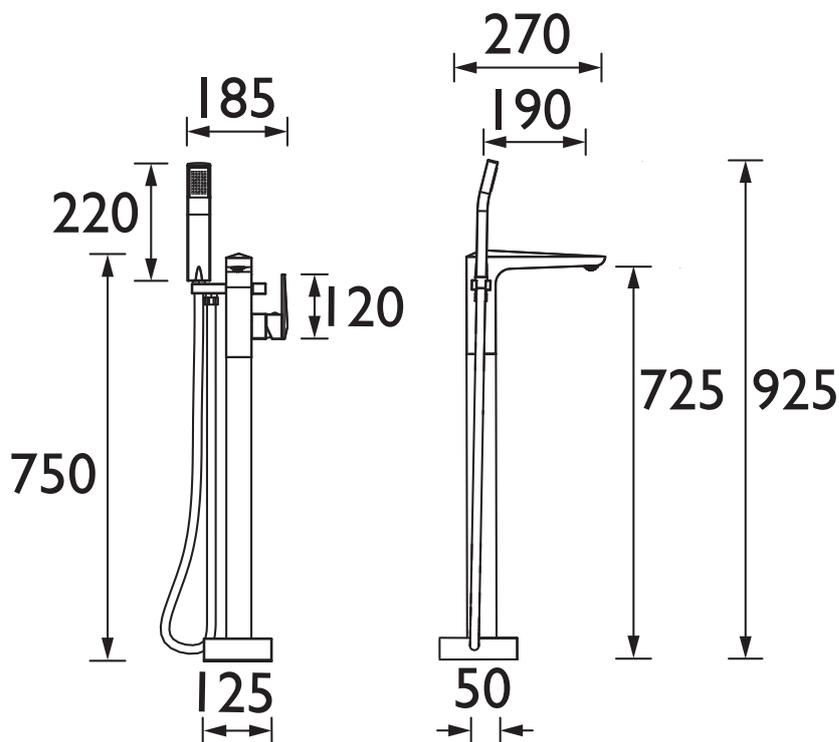

Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	5
THPCI71 (mixed)	8.9	12.86	17.8	21.8	28.1