## SGCB03

## GLASTONBURY Shower Range Glastonbury Exposed Shower Valve with Bottom Outlet Connection Chrome



Optimised for UK market, designed to work at pressure range of 0.1 - 5.0bar Thermostatic temperature control and automatic stop prevent surges of

Adjustable inlet centres, allowing you to use existing pipework with centres measuring anything between 136mm

Performance Flow to provide a

**Features:** 


hot or cold water

and 158mm.

drenching experience

Specification	
Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Exposed Sequential
Shower Head Type:	None
Shower Kit:	None
Valve/Cartridge Type:	Sequential Cartridge
Maximum Hot Water Supply Temperature <sup>o</sup> C:	65
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

## Dimensions (measurements in mm)

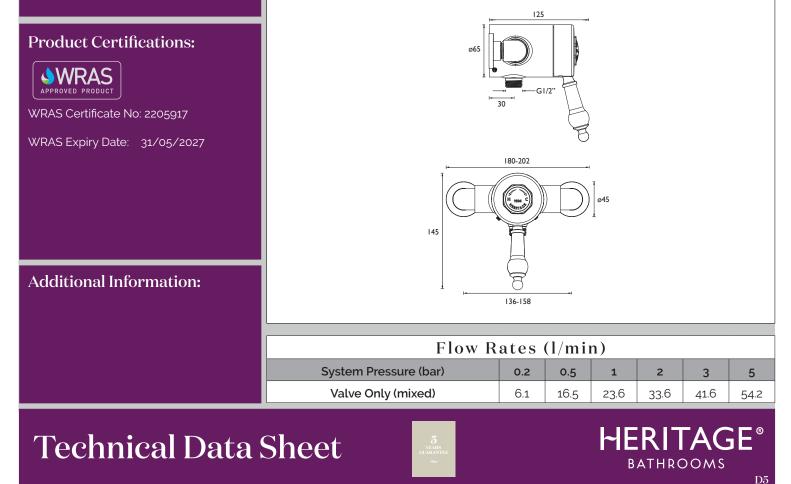

Heritage Bathrooms, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Telephone: 0330 026 8503. Web Site: www.heritagebathrooms.com Email: technical@heritagebathrooms.com. 'Non-chrome product finishes carry a 3 year guarantee on finish. All of our products are covered by a guarantee. Most include both parts and labour. Please note that guarantees are only valid with a proof of purchase. Our guarantees apply to products in domestic use. Any products in commercial use carry a guarantee of 1 year. See www.heritagebathrooms.com/warranty for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Heritage Bathrooms pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.