SHDDUAL06

HARTLEBURY Shower Range

Hartlebury Recessed Thermostatic Dual Control Shower Valve with Premium Fixed Head and Flexible Riser Kits Vintage Gold



Features:


- Optimised for UK market, designed to work at pressure range of 0.2 - 5.0bar
- Performance Flow to provide a drenching experience
- Smallest recessed valve on the market, will fit into a 35mm cavity space
- Large 6" shower rose, premium handset and hose outlet included


Product Certifications:





Additional Information:

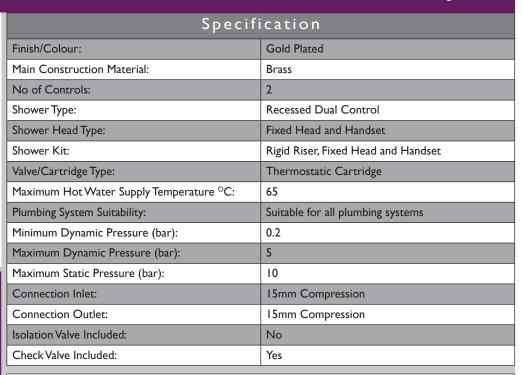

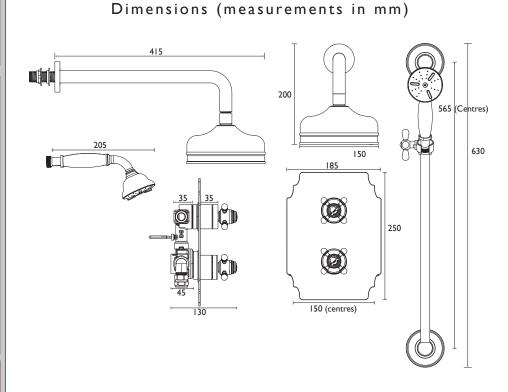

Flow Rates (I/min)						
System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	2	3.1	4.4	6.3	7.7	9.9
Through Fixed Head (mixed)	1.9	2.9	4.2	5.9	7.2	9.3

TECHNICAL DATA SHEET





D: