SGDUAL03

GLASTONBRY Shower Range

Glastonbury Recessed Thermostatic Dual Control Shower Valve with Premium Fixed Head and Flexible Riser Kits Chrome



Features:

- Optimised for UK market, designed to work at pressure range of 0.2 - 5.0bar
- Thermostatic temperature control and automatic stop prevent surges of hot or cold water
- Performance Flow to provide a drenching experience
- Smallest recessed valve on the market, will fit into a 35mm cavity space
- Large 6" shower rose, premium handset and hose outlet included


Product Certifications:





Additional Information:

Specification				
Finish/Colour:	Chrome Plated			
Main Construction Material:	Brass			
No of Controls:	2			
Shower Type:	Recessed Dual Control			
Shower Head Type:	Fixed Head & Single Function Handset			
Shower Kit:	Rigid Riser with Fixed Head			
Valve/Cartridge Type:	40mm Diverter Cartridge			
Maximum Hot Water Supply Temperature °C:	65			
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced			
Minimum Dynamic Pressure (bar):	0.2			
Maximum Dynamic Pressure (bar):	5			
Maximum Static Pressure (bar):	10			
Connection Inlet:	15mm Compression			
Connection Outlet:	G I/2"			
Isolation Valve Included:	No			
Check Valve Included:	Yes			

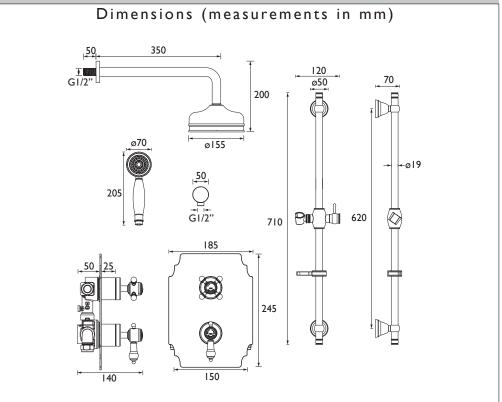

Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
Through Handset (mixed)	2	3.1	4.4	6.3	7.7	9.9		
Through Fixed Head (mixed)	1.9	2.9	4.2	5.9	7.2	9.3		

TECHNICAL DATA SHEET





D3