## SHPRGDUAL01

HEMSBY Shower Range
Hemsby Recessed Rose Gold Shower with Deluxe Fixed Head and Flexible Kits



Е	മാ	tu	re	c.
	cα	ւս	U	Э.


- Hemsby Recessed Shower with Deluxe Fixed Head and Flexible Kit, Rose Gold
- Optimised for UK market, designed to work at pressure range of 0.2 - 5.0bar
- Thermostatic temperature control and automatic stop prevent surges of hot or cold water
- Performance Flow to provide a drenching
- Smallest recessed valve on the market, will fit into a 35mm cavity space
- Extra large 8" shower rose, deluxe 4" handset and hose outlet included
- Ceramic disc for smooth operation and added durability
- Recessed

## **Product Certifications:**



A 1				r		
$\Delta \alpha$	ан	onal	I In	torr	MATI	$\sim$ $\sim$
_	ши	ULIAL				LOI I

Specification				
Main Construction Material:	Brass			
No of Controls:	3			
Shower Type:	Recessed Thermostatic Shower			
Shower Head Type:	8" Rose Shower & Deluxe Handset			
Handle Type:	Crosshead			
Valve/Cartridge Type:	Thermostatic Cartridge			
Maximum Hot Water Supply Temperature °C:	65			
Maximum Static Pressure: (bar)	10			
Plumbing System Suitability:	All - Ideally Balanced			
Working Pressure Range:	Min. 0.2 Bar, Max. 5.0 Bar			
Connection Inlet:	15mm Compression			
Connection Outlet:	15mm Compression & G 1/2"			
Isolation Valve Included:	No			
Check Valve Included:	Yes			

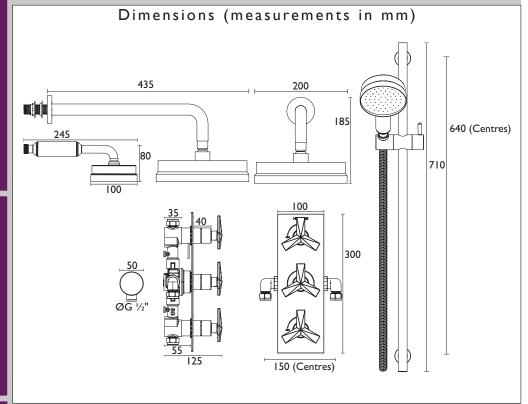

Flow Rates (I/min)							
System Pressure (bar)		0.5	I	2	3	5	
Through Handset (mixed)		12.8	19	27.6	33.8	43.64	

## TECHNICAL DATA SHEET YEAR



