
SHDDUAL07

HARTLEBURY Shower Range

Hartlebury Exposed Thermostatic Dual Control Shower Valve with Premium Fixed Riser Kit Chrome



| Features: |
|-----------|
|-----------|

- Optimised for UK market, designed to work at pressure range of 0.2 - 5.0bar
- Performance Flow to provide a drenching experience
- Smallest recessed valve on the market, will fit into a 35mm cavity space
- Large 6" shower rose, premium handset and hose outlet included

Product Certifications:





WRAS Cert. Number: 2310900 WRAS Expiry Date: 31/10/2028





Additional Information:

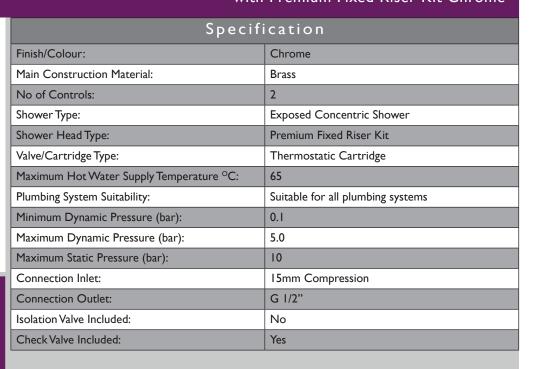

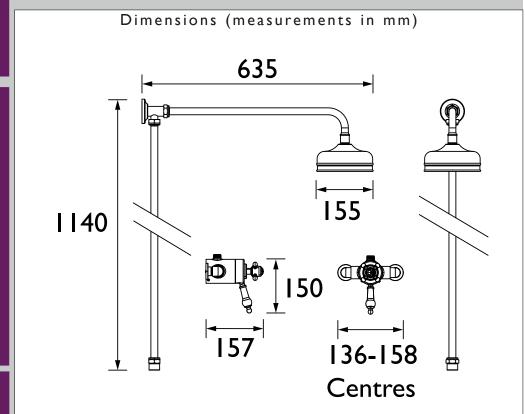

| Flow Rates (I/min) | | | | | | | |
|-------------------------|------|------|------|------|------|------|--|
| System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 | |
| With Flow Regulators | | 13 | 14.1 | 14.2 | 15 | 15.5 | |
| Without Flow regulators | 10.6 | 18.1 | 26.5 | 37.5 | 45.9 | 59.3 | |

TECHNICAL DATA SHEET



