



## Specification

<b>Product Type:</b>	Bathroom Taps
<b>Main Construction Material:</b>	Brass
<b>Mount Type:</b>	Wall Mounted
<b>Handle Type:</b>	Crosshead Handles
<b>Connection Inlet:</b>	G 1/2" Female
<b>Connection Outlet:</b>	M24 Flow Straightener
<b>Number of Tap Holes:</b>	3
<b>Valve/Cartridge Type:</b>	3/4" Long Stem Ceramic Disc Valves
<b>Plumbing System Requirements:</b>	Suitable for all plumbing systems
<b>Minimum Dynamic Pressure (bar):</b>	0.2 bar
<b>Maximum Dynamic Pressure (bar):</b>	0.5 bar
<b>Maximum Hot Water Temperature °C:</b>	65°C
<b>Maximum Static Pressure (bar):</b>	10 bar
<b>Flow Type:</b>	Single Flow
<b>Isolation Included:</b>	No


## Features:

- Long life ceramic cartridge for added durability and smooth control. - Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- 10 year parts and 1 year labour guarantee for peace of mind.
- Co-ordinating Bathroom taps, Recess shower and Accessories available.
- Not suitable for use with roll top-baths.

## Product Certifications:



## Dimensions (measurements in mm)

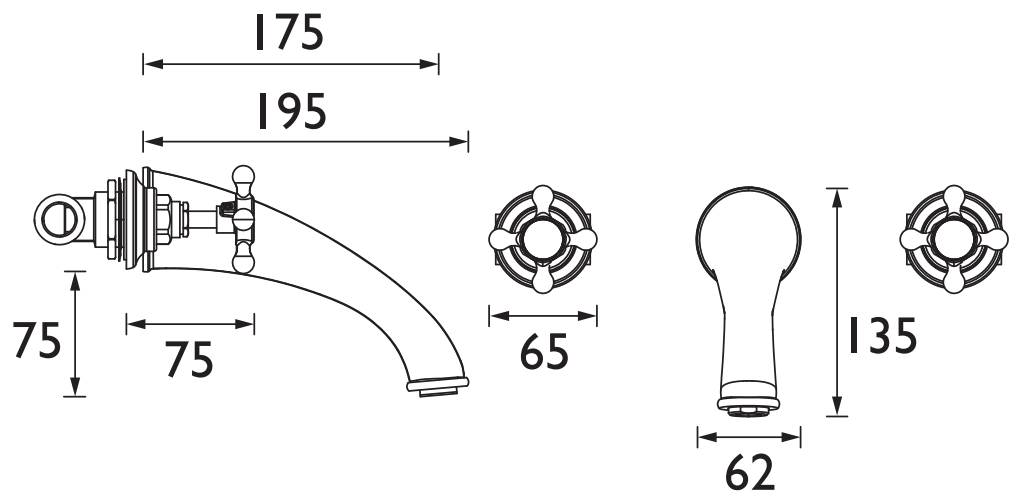

## Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
TTRCC073 (mixed)	15.1	24	33.9	47.6	58.3	75.2
TTRCC073 (Hot)	9.84	15	21.18	29.88	36.84	47.2
TTRCC073 (Cold)	9.42	14.76	20.68	29.42	36.46	46.84

## Additional Information: